

Pro-Series™ Meter Vented Hopper Lid Instructions


Parts List

1. Vented Hopper Lid (720225)




! Purpose:

The purpose of the vented hopper lid is to release the excess pressure in the hopper when the CCS tank empties and seed flow to the meter has stopped. The lid prevents back pressure which can cause the seed in meter to flow over the brush.


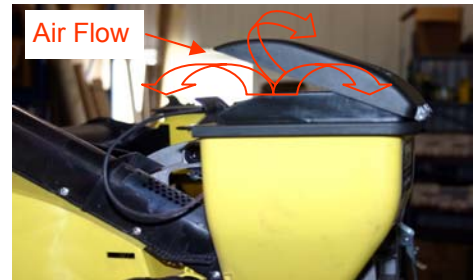


Step 1 Remove the old lid from the hopper by undoing the rubber lanyard and pulling the lid off the hopper.

Step 2 Take the rubber lanyard and feed the T shaped end through the lower hole until tab end stops on lower hole. Feed T shaped end through top hole and pull till loop is tight to the lid. Replace lanyard to hopper.

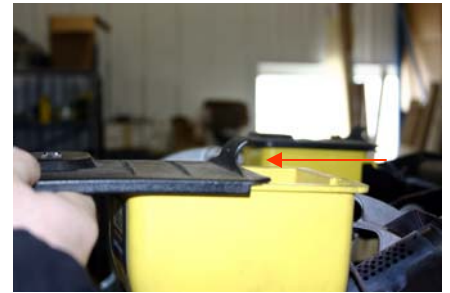

Step 3 Replace lid by sliding it on until it locks into place

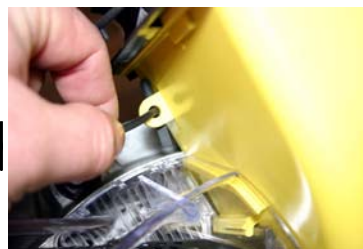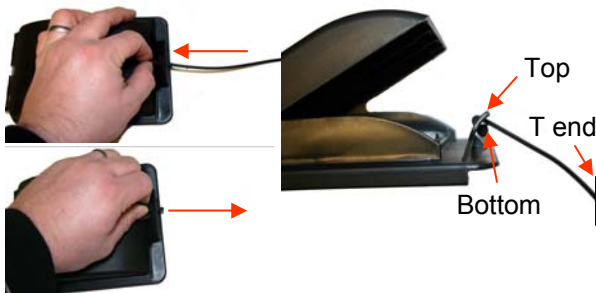

Note:

The vented lid will only open halfway and then stops. DO NOT try to force lid open. This stop is so the lid can seal itself again after it has vented.

